




参照标准：API 16A、GB/T 20174、API 16ST

产品特点

- 
- 3 1/8 " 7 1/16 " 2000psi-15000psi
- 
- 
- 
- 
- 

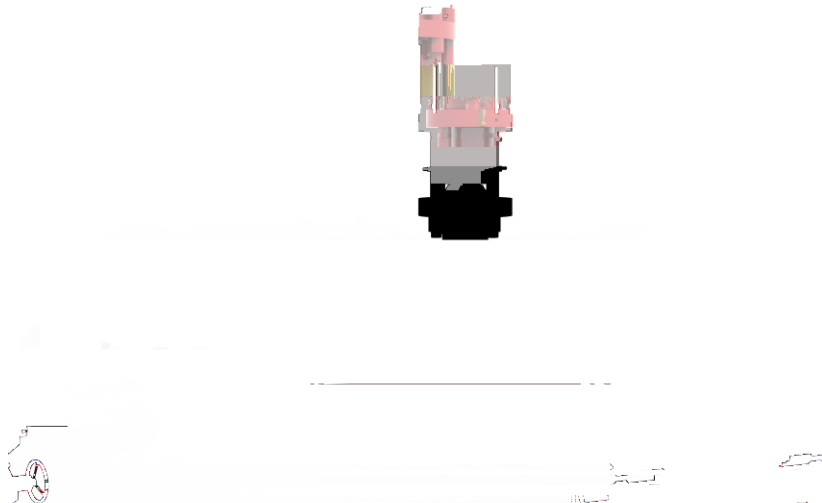

最高工作压力等级      最大通径      抗硫标准

应用于中国东北、鄂尔多斯等地区，东南亚

技术参数

3 1/16 " 3 1/8 " 4 1/16 " 5 1/8 " 7 1/16 "

3000psi 5000psi 10000psi 15000psi

T-20/350

BGF

NACE MR0175

