


CFR-A5 Pro

CFR-A5 Pro 0 100CN
30 85CN

GB/T 386, ASTM D613, IP 41, EN ISO 5165

- CFR
82.55mm 114.30mm 8:1 36:1 CFR-48
ASTM D613 GB/T 386
90°

- “ ”
6 1 “ ”

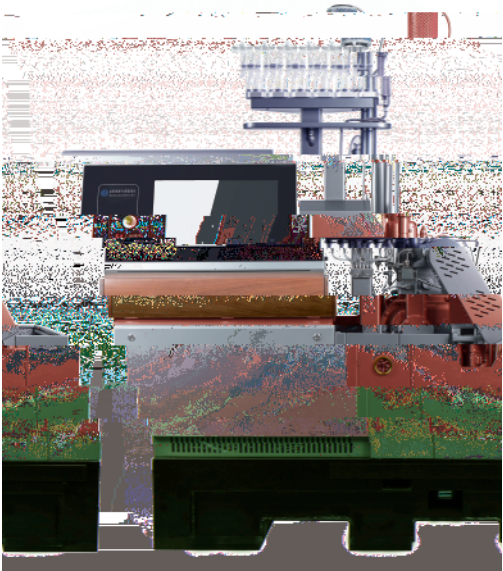

•

•

WIFI

GB/T 386, ASTM D613 IP 41,EN ISO 5165									
		0	100			30	85		
		82.55mm 3.250inch							
		114.30mm 4.50inch							
		8:1	36:1,						
		611729.10mm³ 37.33in³							
		100	± 2	212	± 3				
		900rpm ± 9rpm							
		13° ± 0.2°							
		10.30MPa ± 0.34MPa 1500psi ± 50psi							
		13.0mL/min ± 0.2 mL/min							
		38	± 3	100	± 5				
		0.20mm ± 0.025mm 0.008in. ± 0.001in.							
		66	± 0.5	150	± 1				
		100	± 2	212	± 3				
		57	± 8	135	± 15				
		172kPa	207kPa	25psi	30psi				

3275kPa ± 138kPa 475psi ± 20psi
-0.25kPa -1.5kPa
635mm ± 25mm 25in. ± 1in.
USB
LIMS WIFI
15KW
15 35 20% 90%RH
AC380V ± 10%,50Hz AC220V ± 10% 50Hz
1700mm × 650mm × 2300mm
1200 KG