


产品介绍

CFR-A50 100CN30 85CN

GB/T 386, ASTM D613 IP 41,EN ISO 5165

产品特点

- CFR
-
- 90°
-
- (13°BTDC)
- OMT
-
- ≥ 60L 0.2 0.4 MPa 15 25
-
-
-

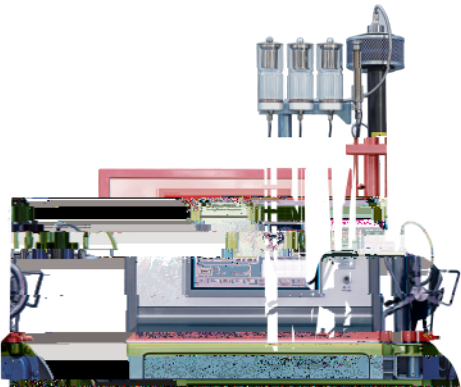

- 3 1
-
-
-
-
-

技术参数

GB/T 386, ASTM D613 IP 41,EN ISO 5165

0 100 30 85

82.55mm 3.250inch

114.30mm 4.50inch

8:1 36:1,

611729.10mm³ 37.33in³

100 ± 2 212 ± 3

900rpm ± 9rpm

13° ± 0.2°

10.30MPa ± 0.34MPa 1500psi ± 50psi

13.0mL/min ± 0.2 mL/min

38 ± 3 100 ± 5

0.20mm ± 0.025mm 0.008in. ± 0.001in.

66 ± 0.5 150 ± 1

57 ± 8 135 ± 15

172kPa 207kPa 25psi 30psi

3275kPa ± 138kPa 475psi ± 20psi

-0.25kPa -1.5kPa		
635mm ± 25mm 25in. ± 1in.		
USB		
LIMS		
15KW		
15 35 20% 90%RH		
AC380V ± 10%,50Hz AC220V ± 10% 50Hz		
1520mm	× 900mm	× 1760mm
1200 KG		